


Pre-assembled Rim Tape Installation Instructions.



NOTE: If planning to install the pre-assembled rim tape during installation of a receptor into a 3-wall shower enclosure, the required width between the opposing shower walls will be the sum of the receptor width plus twice the backer rod thickness. If this width is not available, the standard format rim tape can be installed instead.

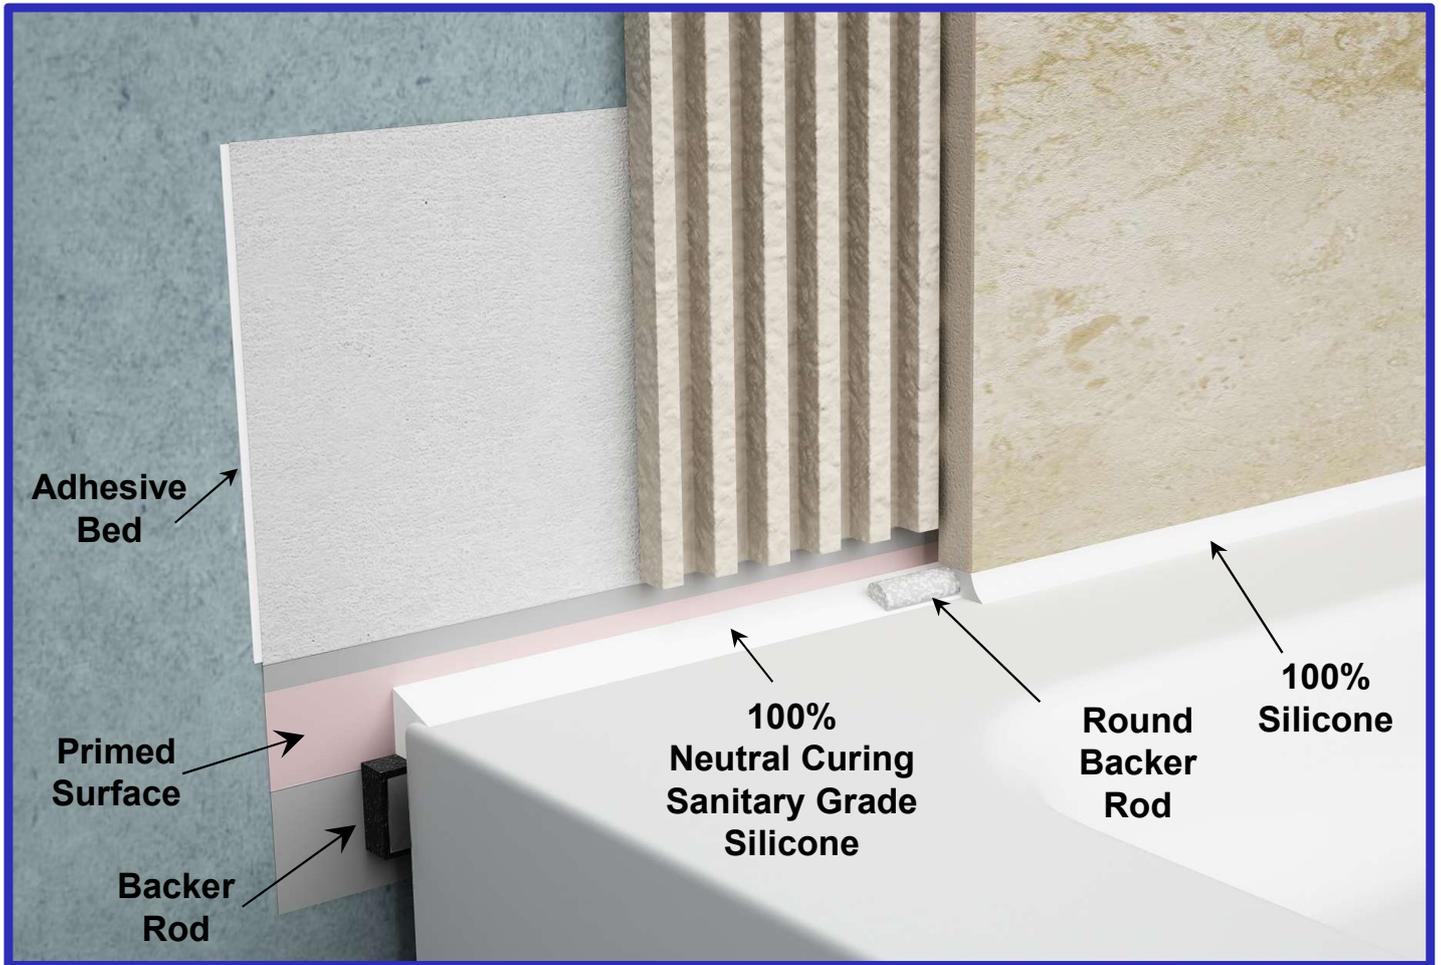

Spatula




Backer Rod Alignment Guide



Pre-assembled Rim Tape




Alcohol Wipes



Quad. Spatula

Pre-assembled Rim Tape Installation Instructions.

Preparation: Remove shower base/bathtub surface protection film from areas in contact with silicone. Ensure receptor surface is of a material type that adheres to silicone. Use wire wool to abrade surfaces in contact with silicone and clean with alcohol wipes or methylated spirits. Ensure all shower wall surfaces behind the rim tape are clean, dry and in good condition. Before bonding the rim tape to wall, ensure receptor rests stable on floor and the waste system is tested for leaks.

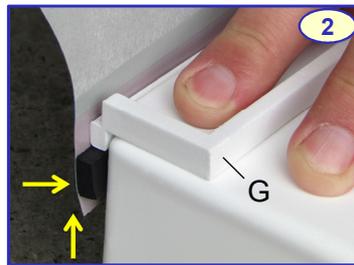

(1) Clean sidewalls with alcohol wipes. (2) Position the backer rod alignment guide (G) on the rim overhanging sidewall. Progressively removing the liner off backer rod, lift rim tape up until backer rod touches underside of the alignment guide G, and then press the exposed adhesive face onto sidewall. (3) At corners, rotate alignment guide to overhang 2 sidewalls. Bend the strip 90° around corner bonding the backer rod onto sidewalls in the process. Rotate, reposition alignment guide and continue as instructed for remaining sidewalls and corners. (4) Pinch backer rod at corners.



(5) With the receptor in final position, remove the entire adhesive release liner off the back of the rim tape. (6) Use the spatula straight edge to **first** press-bond the exposed adhesive bed fully into each wall corner and **then** (7) onto walls without creasing the rim tape in the process. (8) Resting a marker tip on the rim tape's upper edge, draw wall lines to define the upper and end boundaries.



(9) Fold the rim tape back away from the wall. The rim tape can be bonded to the wall using an approved: liquid shower wall waterproofing compound or (10-11) sealant adhesive or tile adhesive (not shown). If using an approved silicone adhesive to bond the rim tape to the shower wall substrates, first apply painters tape outside the rim tape's upper and end boundaries to prevent smearing sealant on the wall. (12) Do not smear silicone adhesive over strip outer face.



(13) Apply painters tape over flat rim surface just outside joint line to avoid smearing silicone on receptor rim. (14) Apply an approved 100% neutral curing sanitary into joint leaving it slightly proud. (15) Rub up the silicone to fall towards rim. Complete one side at a time. (16) Remove painters tape off rim (and wall if applied) soon after.